

# Urban Woods Collection

Faux wood,  
real style!

## Stylish

- The natural characteristics of real timber means many colour and grain variations which can produce an inconsistent looking product. Urban Woods Collection features a contemporary colour palette and have been developed to capture the look of real wood whilst eliminating any inconsistencies.

## Functional

- Thickness of the slat gives the blind more strength and allows for wider tape spacing, making fabrication and installation quicker.

## Durable

- Made from polystyrene and engineered to resist fading, cracking, discolouration, peeling and warping.
- Slat can be easily cleaned with a damp cloth with no need to continually re-stain the blinds as you do with real wood.
- UV coated and moisture-resistant suitable for use in hot and humid climates and also features a beaded finish to reduce scuff marks.



### V-Lift

Allows you to raise or lower the blind to any desired position by moving the bottom rail without the need for complex release mechanisms. Slats are tilted using a wand control.

- Tilting wand comprises of clear PVC blending into the slats for an unobtrusive view.
- Combines the Child Safety benefits of a cordless system with all the advantages and versatility of a faux timber venetian.



### CordLock

Traditional operation with a cordlock system to tilt the slats and raise & lower the blind.



BLIND MAKERS



## Technical Data

### Product Specifications

Slat Thickness	3.2mm +/- 0.15mm
50mm Slat Weight	80-85 gms / 1MT
Valance	83mm curved valance
Bottom Rail	50mm x 15mm rectangular style
Slats Widths	50mm and 63mm

### Maximum Blind Sizes

	CordLock	V-Lift System
Max Width	2400mm	1600mm
Max Drop	3000mm	1800mm
Maximum m <sup>2</sup> [50mm & 63mm slat]		
Operable	3.6m <sup>2</sup>	2.9m <sup>2</sup>
Tilt Only	4.0m <sup>2</sup>	N/A

### Spacing - String Tape

Slat Size	Max Distance	Max between routs
50mm & 63mm	152mm	400mm

### Stacking Measurements for Fully Raised Blind

Height of Blind	800mm	1200mm	1600mm	2000mm	2400mm	2800mm
Raised with String Tape 50mm Slat	140mm	170mm	200mm	230mm	260mm	290mm
Raised with Woven Tape 50mm Slat	150mm	190mm	230mm	270mm	310mm	350mm
Raised with String Tape 63mm Slat	110mm	135mm	15mm	180mm	200mm	225mm

### Testing

**UV** - All Slats are coated with an acrylic UV top coat and are completely UV protected. In accelerated UV testing, all slats achieved a light fastness of 6-7 out of 8 where 8 features no colour change.

**Heat Resistance** - All the slats have undergone stringent heat testing and have achieved the following results; no distortion present between 48° - 60° and 1.5mm maximum movement between 61° - 71°.


**Plastic Testing** - Incoming plastic raw materials are tested for lead content on a regular basis. [Must be less than 200 parts per million, US standard, part 1303, Title 16, Code of Federal Regulations, Chapter II - Consumer Products Safety Commission of USA]. All submitted samples have passed testing and content is well below permitted limits for safety.

All slat, bottom rail and valance can be purchased in 2.9m lengths [colours Alpine White and Warm White in both 50mm and 63mm slat sizes are also available in 1.95m lengths], please refer to your price list for pack sizes.

- Slat cuts well and will not chip with 250/300 mm saw blade, type Z80.
- Punch holes do not crack or chip, provided punches are kept sharpened.
- To prevent scratching, we recommend opening boxes down the full length and removing the slat / rail / valance from the side of the box.

The Valance and the Bottom Rail are both made from PVC foam [more traditional faux wood material]. They are better made this way, as co-extruded polystyrene does not work so well for complex shapes in thicker material. The valance and bottom rail are also painted, and printed with the same design as the slat so they match perfectly.

### Colours

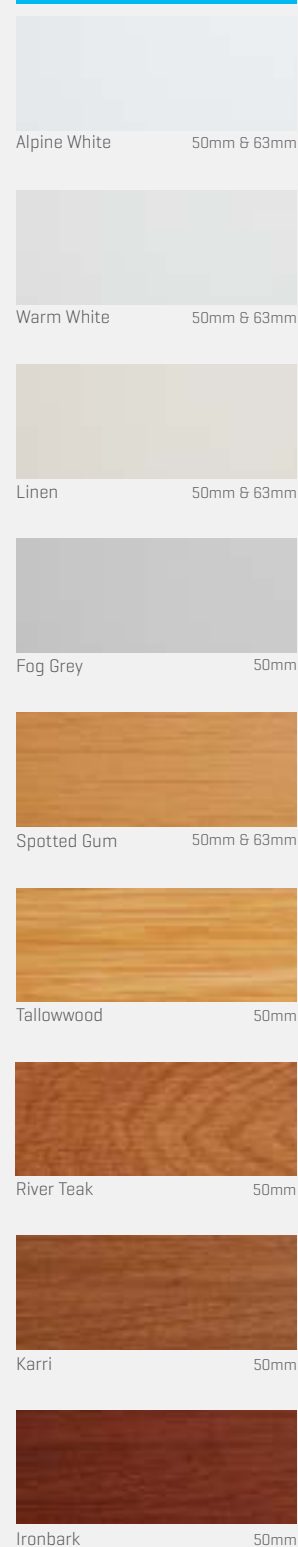

# BLIND MAKERS